


## Cordguard Razor Barb

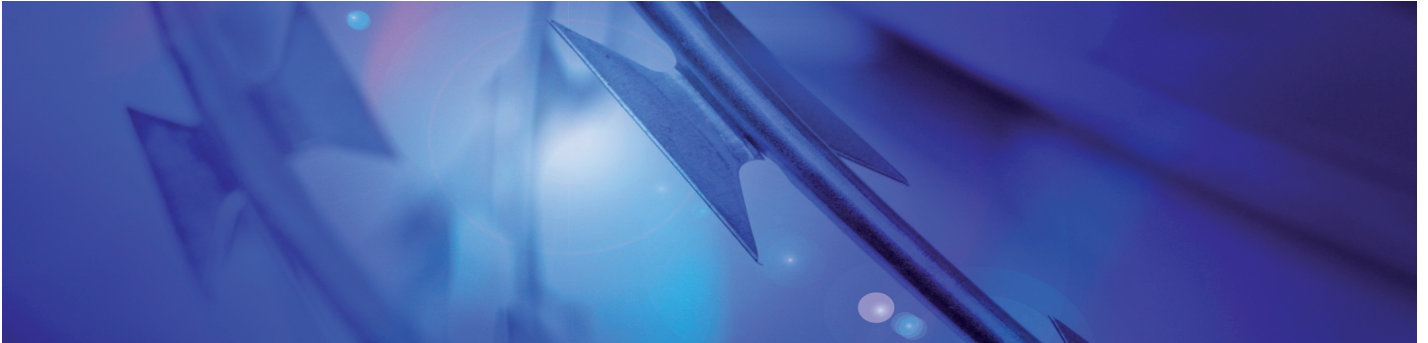

### Product Features

- Manufactured to the highest quality standards and in compliance with UK government specifications
- Available in Galvanised or Stainless Steel (Grade 304L)
- The product consists of steel strip die stamped to create razor sharp barbs at regular intervals, and formed around a core of high tensile wire
- The angle of the barbs produces a formidable barrier designed to prevent secure handholds at any point along its length
- Razor Tape is cold-clenched around the spring steel core with a minimum wrap of 260 degrees


### Applications

Razor Barb can be deployed as an additional barrier in a wide range of different situations


- Prisons
- Secure Hospitals
- Airports / Railway Stations
- Military Installations
- Commercial Property




Razor Barb Short Profile



Razor Barb Medium Profile

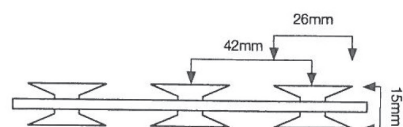

Razor Tape Medium Profile

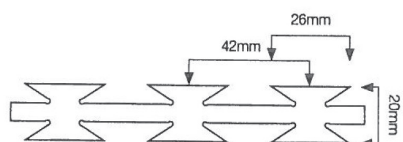

## Cordguard Razor Barb

### Product Description

SHP Product Code	Coil Diameter (mm)	No. of Clips around Circumference	Recommended Coil Extension	Loops per Coil	Approx. Weight per Coil	Pallet Quantity boxed (un-boxed)
<b>Short Barb</b>						
RBC4S	455 (18")	3	8-10m	56	7kgs	48 (120)
RBC7S	710 (28")	5	10-12.5m	56	11kgs	25 (60)
RBC9S	965 (38")	5	10-12.5m	56	14kgs	20 (60)
<b>Medium Barb</b>						
RBC4M	455 (18")	3	8-10m	56	7kgs	48 (120)
RBC7M	710 (28")	5	10-12.5m	56	11kgs	25 (60)
RBC9M	965 (38")	5	10-12.5m	56	14kgs	20 (60)
<b>Razor Barb Coil Unclipped (RBU)</b>						
<b>Short Barb</b>						
RBU20S	-	-	200m	-	16kgs	20 (60)
<b>Medium Barb</b>						
RBU20M	-	-	200m	-	16kgs	20 (60)
<b>Razor Tape (supplied on spools)</b>						
<b>Short Barb</b>						
RTS5S	-	-	50m	-	3kgs	(100)
<b>Medium Barb</b>						
RTS5M	-	-	50m	-	3kgs	(100)

### Coil Finishes Available

#### Galvanised

Core Wire: Galvanised 2.48mm to BS EN 10244-2:2001 Class A  
 Tensile Strength: 1350 - 1500 N/mm<sup>2</sup>  
 Zinc Coating: 230g/m<sup>2</sup> minimum coating thickness

Tape: Galvanised 0.42mm thick slit coil to BS EN 10142:1991  
 Tensile Strength: 270-500 N/mm<sup>2</sup>  
 Zinc Coating: 280g/m<sup>2</sup> minimum (total for both sides)

#### Stainless Steel

Core Wire: Hard Drawn 2.50mm Austenitic 304/S15 to BS1554:1990  
 Tensile Strength: 1500 - 1600 N/mm<sup>2</sup>

Tape: 0.40mm thick slit coil Austenitic 304/2B to BS1449:1983  
 Tensile Strength: 500-800 N/mm<sup>2</sup>

#### WARNING

We are advised that normal and proper use of this product does not amount to a criminal offence.

So far as civil liability is concerned, customers are entitled to take reasonable precautions to protect their property, provided they do not set out to use a hidden trap for such purposes. We therefore advise our customers to adopt the following procedure when using the products:-

1. ENSURE THAT THE RAZOR BARB IS LOCATED IN A PROMINENT POSITION SO THAT IT CAN BE SEEN BY ANY PERSON APPROACHING, E.G. ON TOP OF AN EXISTING FENCE, WALL OR ROOF, OR INSIDE AN OUTER FENCE.
2. DISPLAY A WARNING SIGN CONTAINING THE FOLLOWING WORDING: 'RAZOR BARB – DANGER' (available on request).
3. ENSURE THAT WARNING SIGNS ARE VISIBLE AT NIGHT.

By adopting the above approach, customers should avoid the possibility of legal action in the event of personal injury.

However, it is the responsibility of the customer to ensure that the use to which the product is put does not infringe the criminal or civil law, and Siddall & Hilton Products Ltd cannot accept liability in the event of such infringement.